
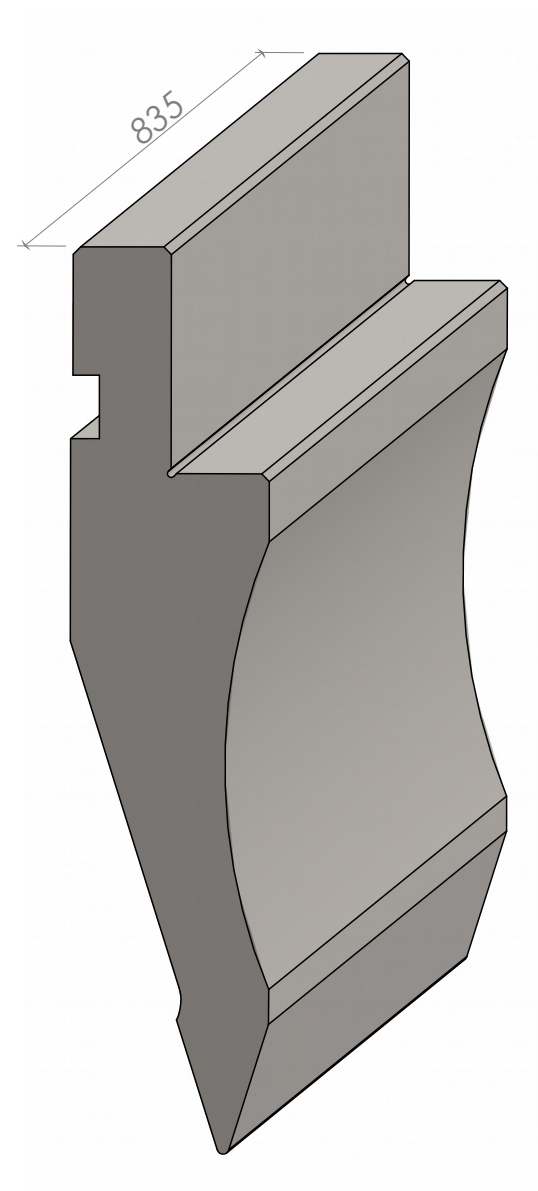


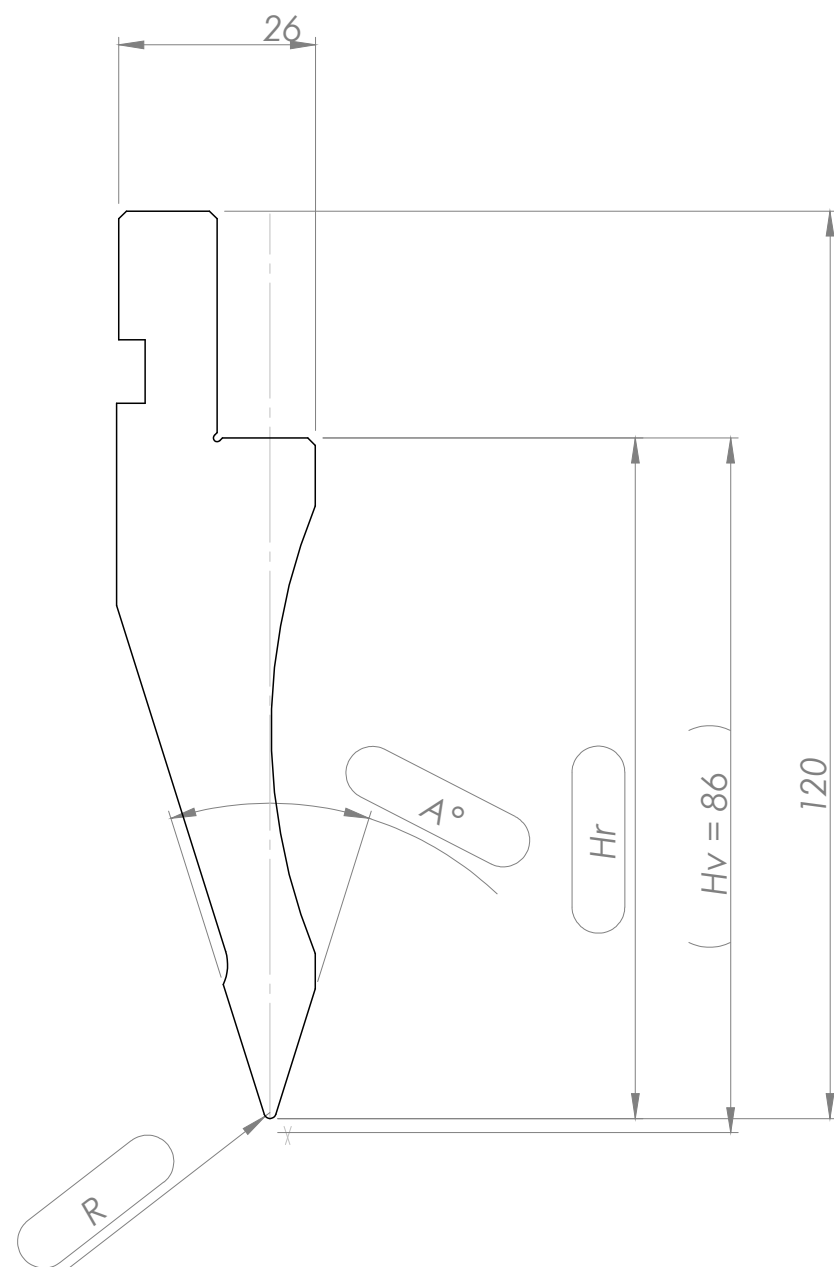

N.	N. Parte	A°	R
1	$35^\circ - R 0,8$	35°	0,8
2	$35^\circ - R 1,5$	35°	1,5

MAX Load: 686 kN/m
 Weight: 11,20 Kg
 Material: 1.0503 (C45)
 Hv = 86 mm

1.0503 (C45)
 TRATTAMENTO TERMICO
 Temprato a Induzione HRC 52-58

PUNZONE SERIE PS 1012-H86