
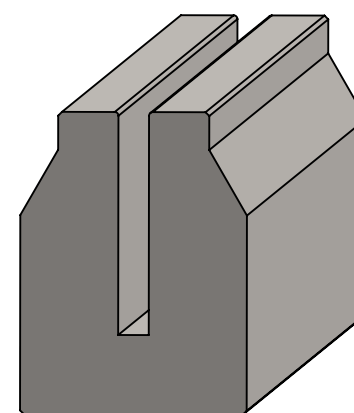
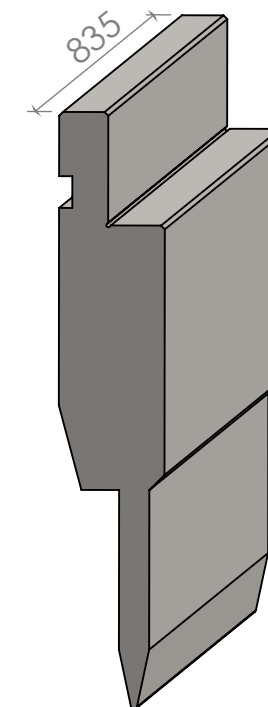
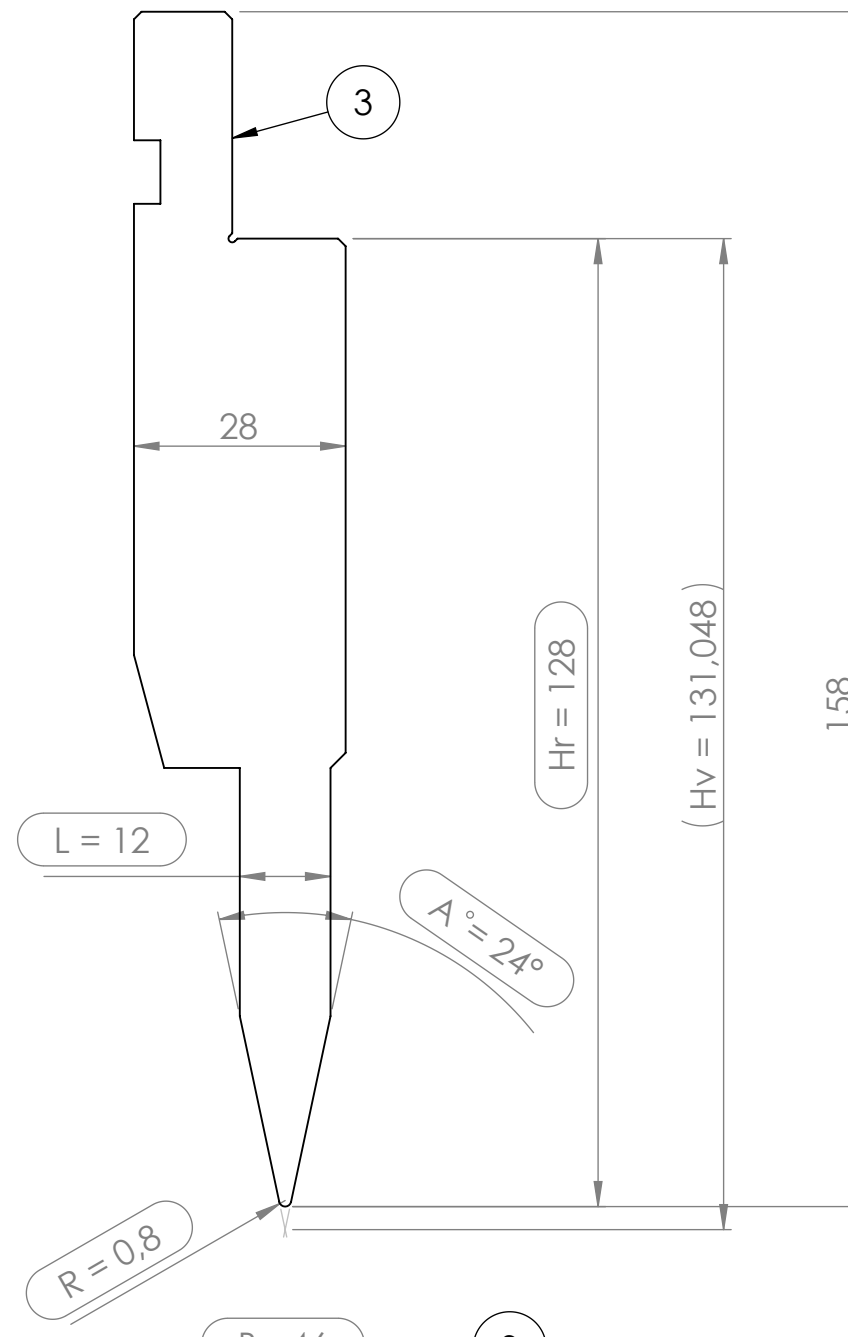
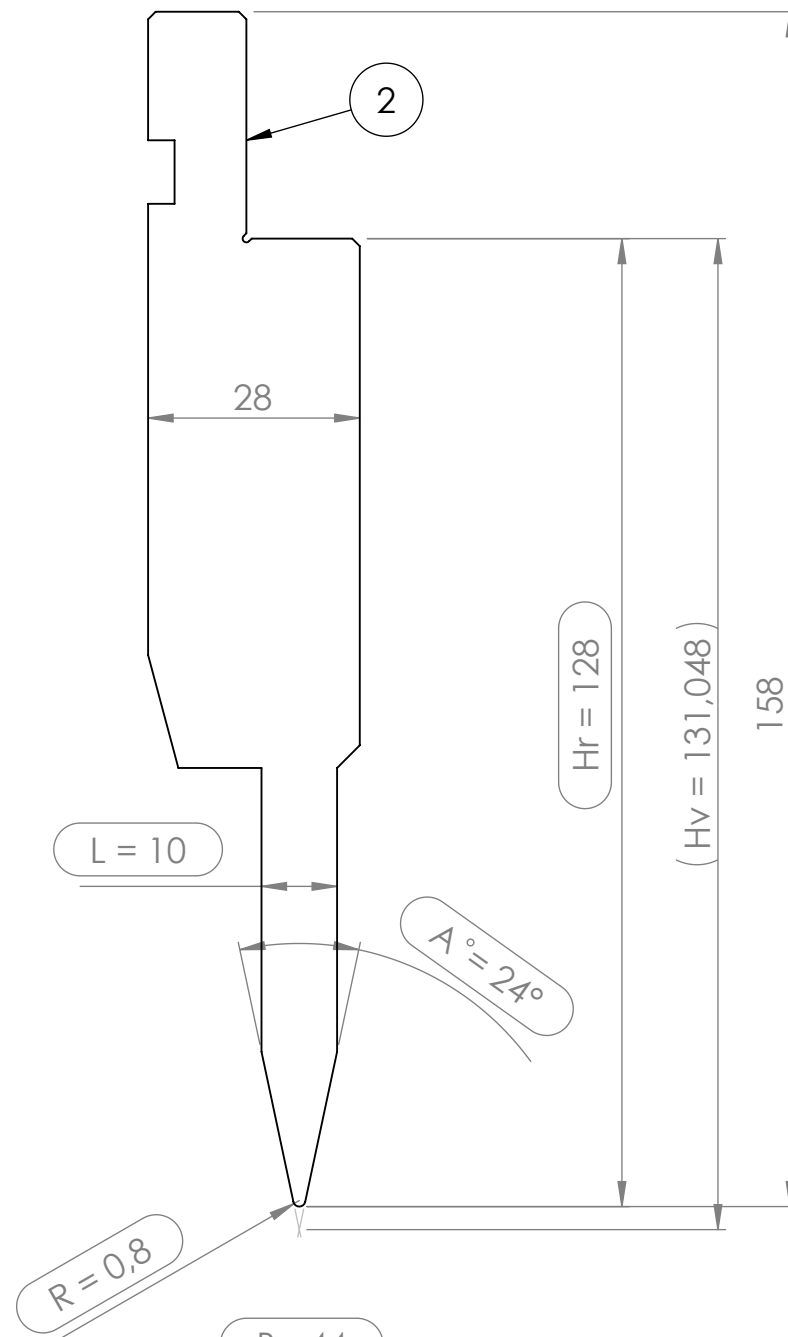


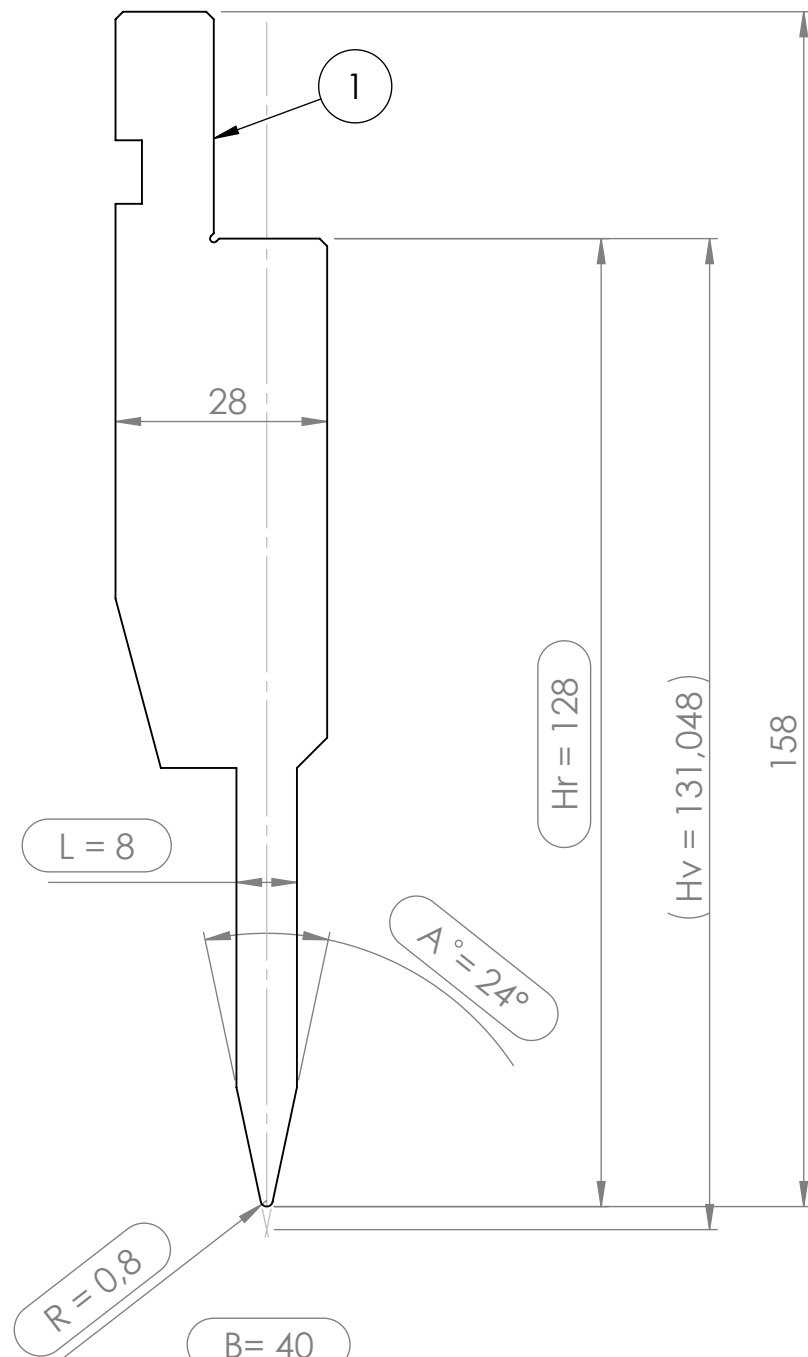

Num. articolo	Num. parte	Spessore lama	A°	R	Hr
1	L-M 08	8	24°	0,8	128
2	L-M 10	10	24°	0,8	128
3	L-M 12	12	24°	0,8	128

CARICO MAX: 800 kN/m

MATERIAL
1.7225 (42CrMo4)

TRATTAMENTO TERMICO
Temprato a Induzione HRC 52-58

PUNZONE SERIE PS 1038